


SMARTBLAST®



AIR RECEIVER – ASME U-STAMPED

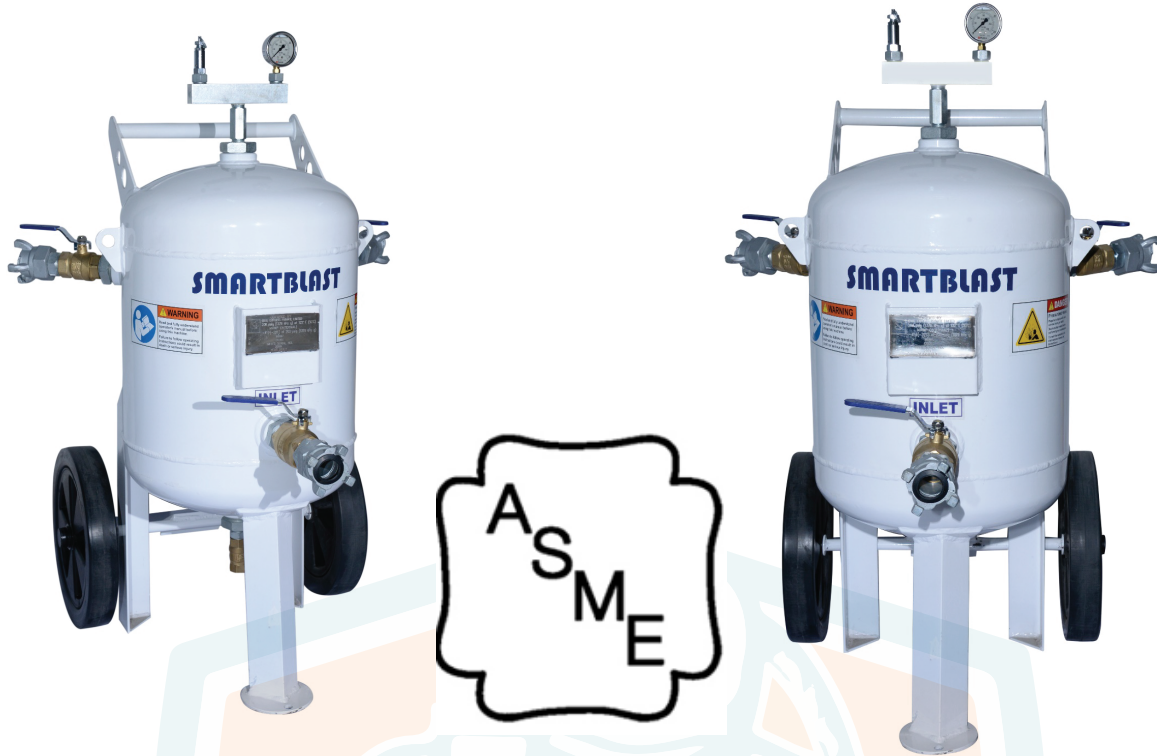

MOISTURE SEPERATOR OPERATING SPECIFICATIONS

- Working Pressure 200 PSI @ 50 °C
- Minimum Designed Metal Temperature -20 °C @ 200 PSI
- Tank capacity 1600 CFM
- Hydro test pressure 260 PSI
- Construction Type ASME Section VIII, Division 1

SR #	MODEL NO	PART NO	TYPE	VOLUME	AIR INLET	AIR OUTLET
01	SMB-1600	SMB-1600-P-W/F	Portable w/f	1600CFM	2" X 1	11/2" X 2 ea., 1"x 2 ea.
02	SMB-800	SMB-800-P-W/F	Portable w/f	800 CFM	2"X1	11/2"X1 ea, 1"x2 ea